


M


M59 (REAR)

FEATURES

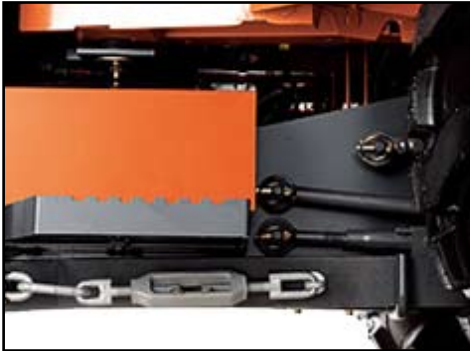


3-Point Hitch Storage

When the backhoe is mounted, this storage area provides a convenient and easily-accessible place to store the optional Category I and II 3-point hitch linkage.

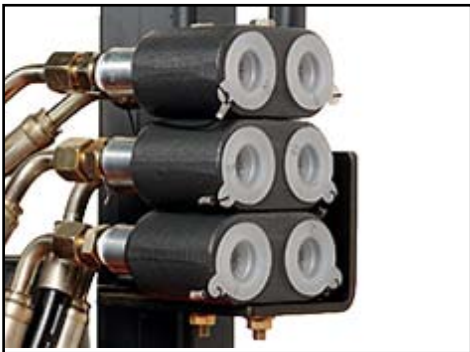

Remote Hydraulic Control Valves

The M59 offers three optional Remote Hydraulic Control Valves for a greater selection of hydraulically powered implements. For operators, this versatile system translates into a convenient and cost-efficient solution.

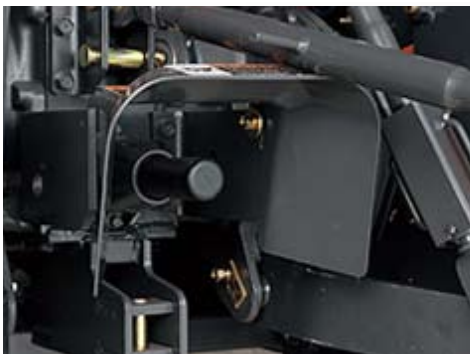

Independent PTO

The hydraulic-independent, 540-rpm PTO expands the use of the M59 to include rear-mounted, PTO-driven implements such as rotary tillers, post hole diggers, snow blowers and rear-mount mowers.



Category I and II 3-Point Hitch

The Category I and II, 3-point hitch provides fast and simple attachment of a wide array of rear-mounted implements. This versatile hitch boasts 2,976 lbs. of lift capacity.