



KX121-3S





SPECIFICATIONS

Specifications


Model		KX121-3S 6-in-1 Blade		
Type of ROPS / FOPS		Canopy / Cab		
Type of tracks		Steel / Rubber		
Engine	Model	Kubota V2203-M-E3		
	Output (SAEJ 1995 gross)	HP (kW)/rpm	40.5 (30.2) / 2250	
	Output (SAEJ 1349 net)	HP (kW)/rpm	39.0 (29.1) / 2250	
	Displacement	cu.in. (cc)	134.1 (2197)	
Dimensions	Overall length	ft.in. (mm)	16'9" (5090)	
	Overall height	Canopy / Cab	ft.in. (mm)	8'3" (2495) / 8'2" (2480)
	Overall width	ft.in. (mm)	5'10"9" (1800)	
	Min. ground clearance	in. (mm)	13.0" (330)	
Hydraulic system	Pump capacity	gpm. (ℓ /min)	25.0 (94.5)	
	Auxiliary hydraulic flow	gpm. (ℓ /min)	15.9 (60)	
	Max. breakout force	Bucket / Arm	lbs. (kgf)	8754 (3970) / 3947 (1790)
Drive system	Travel speed	Low / High	mph (km/h)	1.7 (2.7) / 3.1 (5.0)
	Max. traction force	Low speed	lbs. (kgf)	9867 (4485)
	Tumbler distance	ft.in. (mm)	5'8" (1710)	
	Crawler length	ft.in. (mm)	7'2" (2175)	
	Shoe width	in. (mm)	13.8" (350)	
	Ground contact pressure	Canopy Rubber / Steel	psi (kgf/cm ²)	4.83 (0.34) / 4.83 (0.34)
	Cab Rubber / Steel	psi (kgf/cm ²)	4.98 (0.35) / 4.98 (0.35)	
Swing system	Unit swing speed	rpm	9.4	
	Boom swing angle	Left / Right	degree	80 / 50
Blade	Dimensions	Width	ft. in. (mm)	5'10.9" (1800)
		Height	in. (mm)	15.16"(385)
	Max. lift above ground	in. (mm)	17.0" (433)	
	Max. drop below ground	in. (mm)	20.7" (527)	
	Max. swing angle	Left / Right	degree	25
	Tilt	degree	10	
Hydraulic oil (reservoir/system)		gal (ℓ)	12.0 (46) / 19.8 (75)	
Fuel reservoir		gal (ℓ)	16.9 (64)	
Operating weight (Including operator's weight 175 lbs.)	Canopy Rubber / Steel	lbs. (kgf)	9789 / 9932	
	Cab Rubber / Steel	lbs. (kgf)	9987 / 10130	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications.

DIMENSIONS

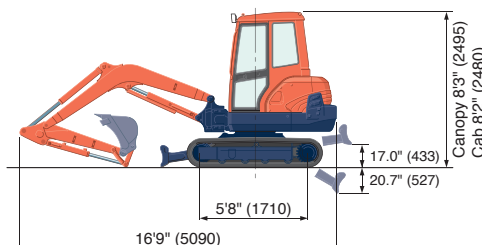

6-in-1 Blade



Unit: ft. in. (mm)