


M

M96SHDM (REAR)

FEATURES

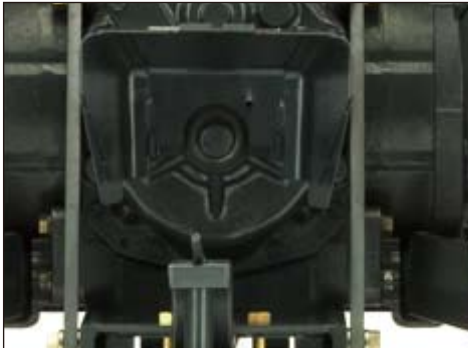

Hydraulic Independent PTO

The hydraulic PTO clutch allows you to engage the implement drive system smoothly, which helps reduce operator fatigue. And because the PTO is independent, you don't have to stop the tractor to engage or disengage the PTO, saving you time when operating implements.



3-point Hitch

The Category II 3-point hitch accepts a variety of rear-mounted implements. The hitch's telescopic stabilizers and lower link ends simplify hook-up and adjustments. The hitch has a capacity of 4630 lbs. (2100 kg). Optional dual assist cylinders raise the capacity to 7490 lbs. (3400 kg).



Floating Lift Rods

Floating lift rods are standard on both sides of the M96SHDM. They give This tractor a smoother ride and enhanced traction while using the 3-point hitch, especially on uneven terrain.



Telescopic Lower Link Ends

The telescopic lower link ends are standard. They facilitate easy implement attachment.



Bevel-Gear Front Axle

The bevel-gear front axle provides the M96SHDM with greater all-round maneuverability. This makes easy work of jobs in tight spaces. The front-axle oscillating angle is 20% greater offering increased stability on uneven terrain. Limited Slip Differential on the front and Differential Lock on the rear are standard features, offering increased stability and traction on challenging ground conditions.