


Powered Rakes

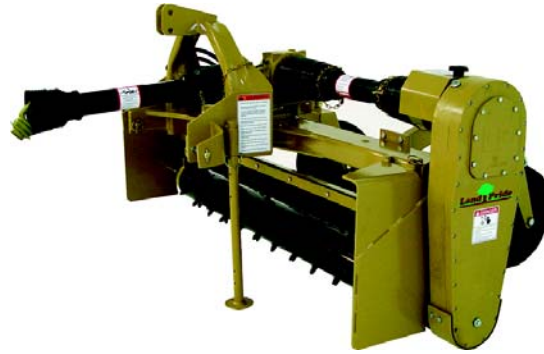

PR1660 & RP1672 Series

	PR1660	PR1672
Working Width	60"	72"
Weight	980 lbs.	1000 lbs.
Tractor Horsepower Range	25-40	25-40
Hitch	Cat. 1	
Quick-Hitch	Fits Land Pride Quick-Hitch	
Gearbox	540 RPM, Ball Bearings, Cast Iron Housing, Drain Plug	
Primary Driveline	Cat. 3 Heavy-Duty	
Secondary Driveline	Cat. 3 with Slip-Clutch	
Material Control Deflector	1/2" X 5" Urethane	
Roller	9 3/8" Dia. with 3/4"X1 1/2" Carbide Tipped Studs or 8 3/16" Dia. with 3/4" Spiral Bars, 180-260 RPM	
Bearings at Roller Ends	Ball Bearing	
Drive Chain	#50 Double Roller Chain	
Angle Adjustment	15 degrees left or right	
Angle Cylinder	2" X 8"	
End Plates	Standard, Removable with Storage Rack	
Gauge Wheels	13" X 6.5"	16.5" X 6.5"
	Air Tires with Sealant and 3/4" Roller Bearings and Spacer Height Adjustment	
Skid Shoes	Replaceable	
Gearbox Lubrication	SAE 90 Weight Gear Lube - 1 1/2 pints empty (Add gear lube until it escapes from lower plug hole.)	
Chain Case Lubrication	Shell Alvania EP00 - 2 1/2 pints empty (Land Pride No. 821-045C) (Add gear lube until it escapes from lower plug hole.)	

Designs, specifications, features and information are subject to change without notice.

This web site is to be used as a guide for the matching of Land Pride Implements on Kubota Tractors in average conditions. Retail customers in conjunction with Kubota/Land pride dealers should use their best judgement to select the best combination of tractor size and implement capabilities. The mismatching of tractor and implements can result in the voiding of Kubota and/or Land Pride Warranties.

Powered Rakes

PR1660 & PR1672 Models

Features	Benefits
Working widths	60", 72" & 90"
Tractor Horsepower Range	PR1660 = 25 - 40 HP PR1672 = 25 - 40 HP PR1690 = 35 - 75 HP
Cat. 3 drivelines with slip-clutch on second driveline	Slip-clutch offers protection to the gearbox and entire power train when a tough obstruction is encountered with the roller.
3/4" x 1 1/2" Carbide Tipped Studs	Carbide tipped studs are very tough, used in the mining industry, this offers a long life to the studs. Studs can be replaced one at a time.
15 Degrees left or right angling	By angling either direction, the user has many options on what direction to work his area.
Gauge wheels with sealant	Tall and wide tires keep turning in fluffy soil. Sealant helps seal against punctures.
End plates with storage	End plates can be used to hold dirt to aid in filling low spots. Easily store the end plates on the Powered Rake so that they are always with the Rake when needed.
Material control deflector	Material control deflector is used to determine what size of material to let pass through the roller and what size to move out.
Replaceable skid shoes	Skid shoes protect larger and vital parts of the unit. As they wear due to soil contact, they can easily be replaced.
#50 Double continuous roller chain	Double roller chain can take the fluctuation loads from the roller due to varying ground conditions.
Cast Iron chain guard housing	Strong enough to protect chain in harsh conditions.
Drive chain enclosed in oil bath with drain plug	Oil keeps the chain and sprockets lubricated to keep abrasion to a minimum. Easy to maintain and change oil level.
5 Year gearbox warranty	Shows our confidence in the gearbox integrity.
Quick Hitch	Can be used with Land Pride Quick-Hitch. (May need extra driveline.)

Designs, specifications, features and information are subject to change without notice.

This web site is to be used as a guide for the matching of Land Pride Implements on Kubota Tractors in average conditions. Retail customers in conjunction with Kubota/Land pride dealers should use their best judgement to select the best combination of tractor size and implement capabilities. The mismatching of tractor and implements can result in the voiding of Kubota and/or Land Pride Warranties.